
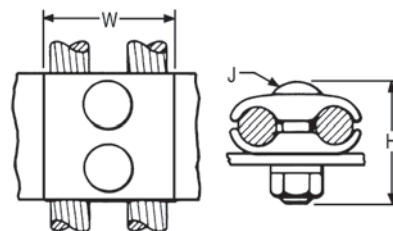


## TYPE GL

### Ground Connector For Two Copper Cables to Bar

High copper alloy ground connector for joining a wide range of two parallel cables to 1/4" thick bar.\* Two-bolt design, separates cable from bar. One-wrench installation. UL467 Listed. The high copper alloy cast body and DURIMUM™ bolts, nuts, and lockwashers make them suitable for direct burial in concrete or ground.



Catalog Number	Conductor	H	J	W
<b>GL4C4C</b>	8 AWG-4 AWG	1-1/2	3/8	1-3/8
<b>GL2626</b>	4 AWG-2/0 AWG	2	3/8	1-3/4
<b>GL2929</b>	2/0 AWG-250 kcmil	2-1/4	1/2	2-1/4
<b>GL3434</b>	300 kcmil-500 kcmil	2-7/8	1/2	2-7/8

#### NOTE:



\* The GB, GBM, GC, GCM, GL and GZ are all used for joining a range of cable to bar. The catalog numbers in each table accommodate the indicated cable range and up to 1/4" thick bar. Optional bolt lengths are available to accommodate up to 1" thick bar. For bar thicknesses from 1/4" to 1/2", add the suffix "T4" to the catalog number in the table. For bar thicknesses from 1/2" to 1", add the suffix "T8" to the catalog number in the table.



## TYPE GZ

### Ground Connector For Copper Cable to Bar

High copper alloy ground connector for joining a wide range of cable to 1/4" thick bar\*. Cable is gripped by curving it around the clamping bolt in connector groove. UL467 Listed. The high copper alloy cast body and DURIMUM™ bolts, nuts, and lockwashers make them suitable for direct burial in concrete or ground.

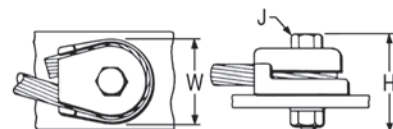

Catalog Number	Conductor	H	J	W
<b>GZ4C-38</b>	8-4	1-1/2	3/8	1-1/8
<b>GZ4C-12</b>	8-4	1-7/8	1/2	1-3/4
<b>GZ4C-58</b>	8-4	2	5/8	1-3/4
<b>GZ26-38</b>	3-2/0	2	3/8	1-5/8
<b>GZ26-12</b>	3-2/0	2-1/8	1/2	1-3/4
<b>GZ26-58</b>	3-2/0	2-1/4	5/8	1-3/4
<b>GZ29-38</b>	3/0-250	2-1/4	3/8	2-1/4
<b>GZ29-12</b>	3/0-250	2-3/8	1/2	2-1/4
<b>GZ29-58</b>	3/0-250	2-1/2	5/8	2-1/4

#### NOTE:

\* The GB, GBM, GC, GCM, GL and GZ are all used for joining a range of cable to bar. The catalog numbers in each table accommodate the indicated cable range and up to 1/4" thick bar. Optional bolt lengths are available to accommodate up to 1" thick bar. For bar thicknesses from 1/4" to 1/2", add the suffix "T4" to the catalog number in the table. For bar thicknesses from 1/2" to 1", add the suffix "T8" to the catalog number in the table.

