

# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

### Applications

- Enclosed and gasketed lighting fixtures for use in storage areas, tunnels, subways, chemical plants and other areas where moisture, dirt or corrosive atmospheres are a problem.
- Suitable for use in wet locations.
- Standard fixtures designed for 60 to 300 Watt medium base incandescent lamps.
- Pendant, feed-thru, ceiling, stanchion and wall mounts available.
- Ventilated steel reflectors with white porcelain finish are available for standard applications. Fiberglass reinforced polyester reflectors are designed for installations where fixture is subject to severe corrosive conditions or vandalism.

### Features

- Modern styling, with clean-line mounting hood and prismatic glass globe, plus optional guard.
- Prismatic globe, furnished as standard, eliminates glare and distributes light evenly.
- Globe seats firmly against composition gasket in mounting hood to keep out dirt and moisture. Full threads eliminate “cross threading.”
- Fixture is complete with gaskets and socket. Socket is shock-absorbing to prolong lamp life and can be easily removed for wiring without tools.
- Porcelain socket construction assures long trouble-free operation in high ambient installations.
- Guards have exclusive snap-on attachment feature for quick installation and fast servicing.
- Reflector style: ①  
(1) fiberglass reinforced polyester reflector in standard dome and 30° angle.
- Maximum input voltage 277 V (suitable for DC applications).

### Standard Materials

- Mounting hoods: copperfree (4/10 of 1% max.) aluminum
- Guards: pressure cast copperfree (4/10 of 1% max.) aluminum
- Reflectors: fiberglass reinforced polyester ①
- Socket: porcelain with brass screw shell
- Globes: prismatic glass

### Standard Finishes

- Mounting hoods and guards: epoxy powder coat
- Fiberglass reinforced polyester reflectors: natural finish
- Socket and globes: natural finish

### Options

- To order fixture with other than standard clear glass globe, add suffix letters to catalog number as indicated in table, and adjust difference in price. ①

Color	Glass Globe	Plastic Globe
Amber	-AM	-PAM
Blue	-BL	-PBL
Green	-GR	-PGR
Red	-RE	-PRE
Clear Heat-Resistant	-HR	—



### Illustrated Features



#### Mounting Hood

Pendant style shown has setscrew to prevent fixture stem from turning. Other styles include stanchion, ceiling and wall mounting.



#### Shock-Absorbing Medium Base Socket

Spring absorbs vibration to prolong lamp life. Porcelain construction for trouble-free operation in high ambient installations.





#### Globe

Attractive, tapered prismatic glass globes for glare elimination and uniform light distribution. Colors available – also vandal-resistant plastic globes. Globe seats firmly against gasket to exclude moisture, dirt and vapors.

#### Guard

Snap-on guards (and reflectors) – simply snap-in and twist. Spring action balls snap into detents of fixture body.

### Guard and Reflectors



### NEC/CEC Certifications and Compliances

- UL Standard: UL 1598, UL 844
- UL Listed: E10444
- CSA Standard: C22.2 No. 250, C22.2 No. 137
- CSA Certified: 025428

① Only listed for UL/NEC Fixtures.

# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

### Class I, Division 2, Groups A, B, C, D

Fixture is suitable for Class I, Division 2 where the fixture operating temperature does not exceed the ignition temperature of the atmosphere in which fixture is installed.

### “T” Numbers Represent the Maximum Lamp Temperature for Class I, Division 2 Locations

Supply Wire: +200 °C (+392 °F)

“T” Number	T1	350	325	T2	T2A	T2B	T2C	T2D	T3	T3A	T3B	T3C	T4	T4A	T5	T6
Temp. Range (°C)	351-450	326-350	301-325	281-300	261-280	231-260	216-230	201-215	181-200	166-180	161-165	136-160	121-135	101-120	86-100	85
Temp. Range (°F)	664-842	619-662	574-617	538-572	502-536	448-500	421-446	394-419	358-392	331-356	322-329	277-320	250-275	214-248	187-212	185

### Class I, Division 2, Groups A, B, C, D – UL/NEC

Reflector	VPGL-1HR (60-200 W)			VPGL-2HR (200-300 W)	
	A-21 @40 67 W	A-23 @40 200 W	A-23 @65 200 W	PS-30 @40 200 W	PS-30 @65 300 W
None	T2D	T2B	T1	T2	T2
Standard Dome	T2D	T2B	T1	T2	T2
30° Angle	T2C	T1	T1	T2A	T2

### Class I, Division 2, Groups A, B, C, D – CSA/CEC

Reflector	VPGL-1HR (60-200 W) @40				VPGL-2HR (200-300 W) @40	
	A-23 60 W	A-23 100 W	A-23 150 W	A-23 200 W	PS-30 200 W	PS-30 300 W
None	T2C	T2C	T2C	T2B	T2B	T2B









# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

Without Guard	With Guard	Type	Lamp Watts	Hub Size (Inches)	NEC Catalog Numbers		CEC Catalog Numbers	
					With Globe and Guard	With Globe Only	With Globe and Guard	With Globe Only
<b>Pendant – 3/4" tapped opening – Furnished with 3/4" to 1/2" reducer</b>								
		A-21Ⓢ	60	1/2 or 3/4	VPA1075G	VPA1075	VCA1075G	VCA1075
		A-23	60-200	1/2 or 3/4	VPA1075G	VPA1075	VCA1075G	VCA1075
		PS-30	200-300	1/2 or 3/4	VPA2075G	VPA2075	VCA2075G	VCA2075
<b>Ceiling – Five Tapped Openings – With mounting lugs and four close-up plugs</b>								
		A-21Ⓢ	60	1/2	VPX1050G	VPX1050	—	—
				3/4	VPX1075G	VPX1075	VCX1075G	VCX1075
		A-23	60-200	1/2	VPX1050G	VPX1050	—	—
				3/4	VPX1075G	VPX1075	VCX1075G	VCX1075
		PS-30	200-300	1/2	VPX2050G	VPX2050	—	—
				3/4	VPX2075G	VPX2075	VCX2075G	VCX2075
<b>Ceiling – Outlet Box Mounting – Fits SEH ① or VPJB cast outlet box, or 4" octagonal outlet box – Furnished with screws and gasket – Octagonal outlet boxes for non-classified areas only</b>								
		A-21Ⓢ	60	3/4	VPOB10G	VPOB10	VCOB10G	VCOB10
		A-23	60-200	3/4	VPOB10G	VPOB10	VCOB10G	VCOB10
		PS-30	200-300	3/4	VPOB20G	VPOB20	VCOB20G	VCOB20
<b>45° Stanchion – 1-1/4" Conduit</b>								
		A-21Ⓢ	60	1-1/4	VPAN10125G	VPAN10125	VCAN10125G	VCAN10125
		A-23	60-200	1-1/4	VPAN10125G	VPAN10125	VCAN10125G	VCAN10125
		PS-30	200-300	1-1/4	VPAN20125G	VPAN20125	VCAN20125G	VCAN20125

① Order SEH box from catalog Fittings Section, 4" octagonal steel boxes from the Commercial Products Section and VPJB cast box from this Section.  
② Only listed for UL/NEC Fixtures.

# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed



Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D



**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

APPLETON™



INCANDESCENT/AREA: NEC/CEC ENCLOSED AND GASKETED

Without Guard	With Guard	Type	Lamp Watts	Hub Size (Inches)	NEC Catalog Numbers		CEC Catalog Numbers	
					With Globe and Guard	With Globe Only	With Globe and Guard	With Globe Only
<b>Wall – Body includes outlet box with five tapped openings – With mounting lugs and four close-up plugs</b>								
		A-21 <sup>Ⓢ</sup>	60	1/2	VPWB1050G	VPWB1050		
		A-23	60-200	3/4	VPWB1075G	VPWB1075	VCWB1075G	VCWB1075
		PS-30	200-300	1/2	VPWB1050G	VPWB1050		
				3/4	VPWB1075G	VPWB1075	VCWB1075G	VCWB1075
				1/2	VPWB2050G	VPWB2050		
				3/4	VPWB2075G	VPWB2075	VCWB2075G	VCWB2075

**Wall – Outlet Box Mounting – Fits SEH ① or VPJB cast outlet box, or 4" octagonal outlet box – Furnished with screws and gasket – Octagonal outlet boxes for non-classified areas only**

		A-21 <sup>Ⓢ</sup>	60		VPOBW10G	VPOBW10	VCOWB10G	VCOWB10
		A-23	60-200		VPOBW10G	VPOBW10	VCOWB10G	VCOWB10
		PS-30	200-300		VPOBW20G	VPOBW20	VCOWB20G	VCOWB20

**Wall – Outlet Box Mounting with Side Hubs – With two side hubs and one close-up plug**

		A-21 <sup>Ⓢ</sup>	60	3/4	—	—	VCW1075G	VCW1075
		A-23	60-200	3/4	—	—	VCW1075G	VCW1075
		PS-30	200-300	3/4	—	—	VCW2075G	VCW2075

① Order SEH box from catalog Fittings Section, 4" octagonal steel boxes from the Commercial Products Section and VPJB cast box from this Section.

Ⓢ Only listed for UL/NEC Fixtures.









# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

	Description	Hub Size (Inches)	Catalog Numbers	
			NEC	CEC
<b>Pendant</b>				
	Furnished with setscrew, 3/4" to 1/2" reducer for 1/2" stem, medium base socket.		<b>VPA75</b>	<b>VCA75</b>
<b>Ceiling – Five Tapped Openings</b>				
	Four close-up plugs	1/2	<b>VPX50</b>	<b>VCX50</b>
		3/4		<b>VCX75</b>
<b>45° Stanchion</b>				
		1-1/4	<b>VPAN125</b>	<b>VCAN125</b>
<b>Wall – Five Tapped Openings in Outlet Box ①</b>				
	Four close-up plugs	1/2	<b>VPWB50</b>	—
		3/4	<b>VPWB75</b>	—
<b>Cast Outlet Box Only – Five Tapped Openings</b>				
	Four close-up plugs. No socket. Fits VPOB, VPOBW and VPWB.	1/2	<b>VPJB50</b>	<b>VCJB50</b>
		3/4	<b>VPJB75</b>	<b>VCJB75</b>
<b>Ceiling – For Outlet Box</b>				
	(Octagonal outlet boxes for non-classified areas only) Fits SEH or VPJB cast outlet box, or 4" octagonal outlet box. With screws and gasket.		<b>VPOB1</b>	<b>VCOB1</b>
<b>Wall – For Outlet Box ①</b>				
	(Octagonal outlet boxes for non-classified areas only) Fits SEH or VPJB cast outlet box, or 4" octagonal outlet box. With screws and gasket.		<b>VPOBW1</b>	<b>VCOBW1</b>
<b>Wall – Outlet Box Mounting with Side Hubs – With two side hubs and one close-up plug</b>				
	(Octagonal outlet boxes for non-classified areas only)	3/4	—	<b>VCW75</b>

① Use 30° angle reflectors for wall installations – center line of fixture must be located at least 5-3/4" away from wall. Has four 3/16" dia. mounting holes located 90° apart on a 3-1/2" dia. center.

# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

APPLETON™

INCANDESCENT/AREA: NEC/CEC ENCLOSED AND GASKETED

		Type	Lamp Watts	Color	Catalog Numbers	
					③ Glass	④ Polycarbonate
<b>Glass and Polycarbonate Globes ①</b>						
<p>Glass Globe ③ (VPGL-1HR)      Polycarbonate Globe ④ (VPGL-2PL)</p>	A-23	60-200	Clear	—	VPGL-2PL	
			Clear Heat-Resistant	VPGL-1HR	—	
			Amber	VPGL-1AM	VPGL-2AMPL	
			Blue	VPGL-1BL	VPGL-2BLPL	
			Green	VPGL-1GR	VPGL-2GRPL	
			Red	VPGL-1RE	VPGL-2REPL	
<b>Glass Globes</b>						
<p>Glass Globe (VPGL-2HR) ③</p>	PS-30	200-300	Clear	—	—	
			Clear Heat-Resistant	VPGL-2HR	—	
			Amber	VPGL-2AM	—	
			Blue	VPGL-2BL	—	
			Green	VPGL-2GR	—	
			Red	VPGL-2RE	—	
<b>Coated Tuff-Skin® ② Glass Globes Contains globe safely even if glass is broken ④</b>						
<p>VPGL-2HRT ④</p>		Heat-Resistant		VPGL-2HRT ④	—	
		Type	Lamp Watts	Catalog Numbers		
				NEC	CSA	
<b>Guards</b>						
<p>VPGU-1      VPGU-2</p>	A-23	60-200		VPGU-1	VCFGU-1	
	PS-30	200-300		VPGU-2	VCFGU-2	
<b>Replacement Porcelain Shock-Absorbing Sockets</b>						
<p>Medium Base</p>	A-23	60-200		VPLR-123	VCLR-1	
	PS-30	200-300				
<b>Replacement Gasket for Globes</b>						
<p>Globe Gasket</p>		Neoprene – for all Stylmaster globes		VPGL-GK	VCGL-GK	

① Shatter-resistant for use in food processing plants, canneries, dairies, breweries, bakeries or anywhere broken glass would prove a hazard. Ideally suited for areas where vandalism, high replacement and high maintenance costs are a problem. CAUTION: Use maximum 200 W lamp less reflector, 100 W max. with reflector or colored globe. Do not use in ambients exceeding 25 °C/77 °F. For burning in vertical base-up position only.

② Registered trademark of Thomas Manufacturing Corporation, Parkton, Md.

③ Only listed for UL/NEC Fixtures.

④ Not an UL Listed option.



# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

	Description	Catalog Number Polyester ①
	Standard Dome Reflector ①	LPRP-25ST
	30° Angle Reflector ①	LPRP-25AN

### Weights

Typical Mounting Hoods							
Pendant	kg (lb)	Ceiling	kg (lb)	Wall	kg (lb)	Stanchion	kg (lb)
VPA75	0.9 (1.98)	VPX75	0.9 (1.98)	VPOBW10	1.4 (3.09)	VPAN-125	1.4 (3.09)
VCA75		VCX75		VCOBW10		VCAN-125	

Globes and Guards					Reflectors			
Type	Globe	kg (lb)	Guard	kg (lb)	Standard Dome	kg (lb)	30° Angle	kg (lb)
60-200 W	VPGL-1	0.9 (1.98)	VPGU-1	0.5 (1.10)	LPR-25ST	1.4 (3.09)	LPR-25AN	0.9 (1.98)
200-300 W	VPGL-2	1.4 (3.09)	VPGU-2	0.5 (1.10)	LPRP-25ST	0.9 (1.98)	LPRP-25AN	0.9 (1.98)

① Only listed for UL/NEC Fixtures.

# Stylmaster™ Incandescent Luminaires

## Enclosed and Gasketed


Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D


**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X

### Dimensions in Millimeters (Inches)


Pendant Mount ①

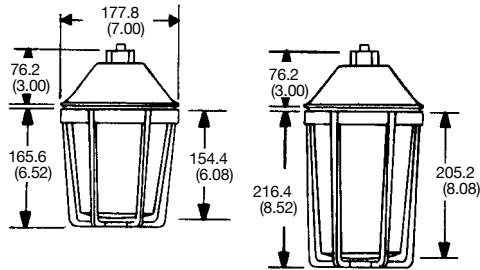


45° Stanchion Mount ① ②

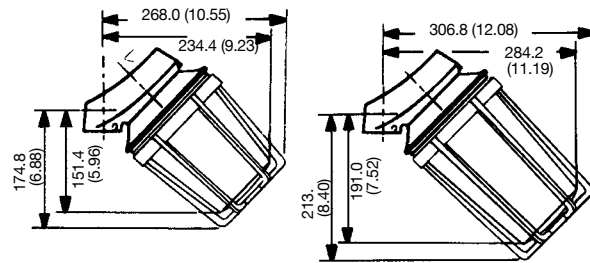


Ceiling Outlet Box Mount




Ceiling Mount for Junction Box





Wall Mount with Junction Box



Wall Outlet Box Mount

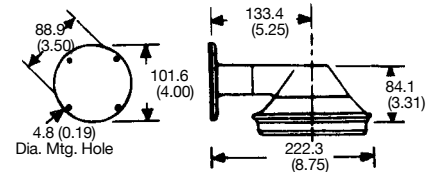

### Junction Box Mounting Body

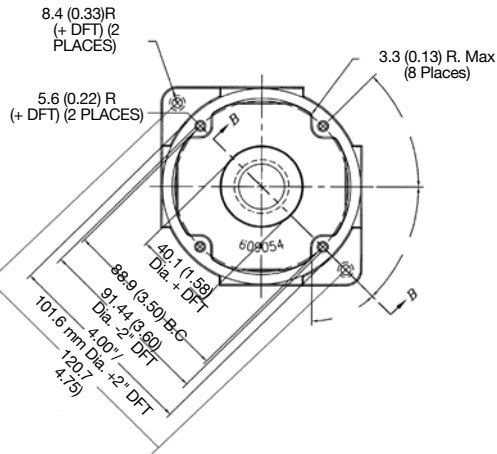

① Height of hood is measured to bottom of flange. Height of globe and guard is from bottom of flange.  
② Dimensions of angle are from center of pipe. Height is measured from pipe stop in stanchion hood.



# Stylmaster™ Incandescent Luminaires


## Enclosed and Gasketed

Attractively styled fixture with prismatic globe. UNILETS® for use with threaded metal conduit.

**NEC:**  
Class I, Division 2, Groups A, B, C, D

**CEC:**  
Class I, Division 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Enclosure 4X



### Photometric Data Without Reflector

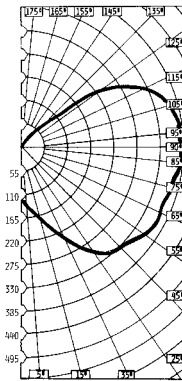

Effective Floor Cavity Reflectance (Rfc) is 20%

% Ceiling Rcc	% Walls Rw	Effective Floor Cavity Reflectance (Rfc) is 20%															
		80			70			50			30			10			0
		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
ROOM CAVITY RATIOS	1	.739	.689	.645	.684	.640	.598	.583	.548	.517	.489	.464	.439	.404	.384	.365	.322
	2	.618	.548	.489	.572	.509	.456	.484	.435	.391	.403	.365	.331	.329	.299	.273	.234
	3	.527	.449	.386	.487	.416	.360	.411	.355	.308	.340	.297	.259	.275	.240	.210	.176
	4	.460	.378	.316	.425	.351	.294	.358	.299	.253	.297	.250	.212	.239	.202	.172	.140
	5	.398	.319	.258	.370	.296	.240	.313	.252	.206	.258	.209	.172	.208	.169	.138	.110
	6	.353	.273	.216	.325	.253	.199	.274	.215	.170	.227	.178	.141	.183	.143	.112	.087
	7	.312	.234	.181	.288	.216	.167	.242	.183	.141	.199	.152	.116	.161	.122	.092	.069
	8	.279	.204	.152	.257	.189	.142	.217	.161	.120	.180	.133	.099	.144	.106	.077	.056
	9	.251	.179	.130	.232	.166	.121	.196	.141	.102	.162	.116	.083	.130	.092	.065	.045
	10	.226	.157	.112	.208	.146	.104	.177	.124	.087	.146	.102	.070	.118	.081	.054	.037



### Standard Dome ①

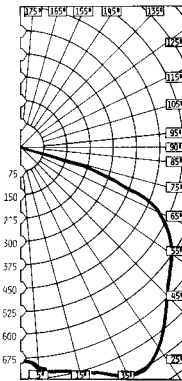

Effective Floor Cavity Reflectance (Rfc) is 20%

% Ceiling Rcc	% Walls Rw	Effective Floor Cavity Reflectance (Rfc) is 20%															
		80			70			50			30			10			0
		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
ROOM CAVITY RATIOS	1	.777	.747	.719	.759	.731	.706	.724	.701	.681	.693	.676	.658	.666	.650	.636	.620
	2	.679	.631	.589	.665	.620	.583	.636	.599	.566	.610	.580	.552	.587	.561	.537	.521
	3	.593	.534	.486	.581	.525	.481	.557	.510	.471	.535	.495	.461	.514	.480	.451	.435
	4	.523	.459	.409	.513	.453	.405	.492	.440	.398	.473	.428	.391	.456	.416	.384	.367
	5	.459	.391	.340	.449	.385	.337	.433	.376	.334	.416	.366	.328	.401	.358	.323	.307
	6	.406	.337	.289	.397	.333	.285	.382	.325	.282	.368	.317	.278	.356	.310	.274	.259
	7	.359	.291	.246	.352	.287	.242	.339	.279	.238	.326	.274	.235	.316	.269	.232	.217
	8	.323	.257	.211	.316	.254	.210	.305	.248	.208	.295	.243	.205	.284	.238	.203	.188
	9	.291	.227	.182	.286	.223	.182	.275	.219	.180	.266	.214	.178	.257	.210	.175	.161
	10	.262	.200	.159	.257	.199	.159	.249	.194	.157	.240	.190	.154	.234	.187	.152	.140

### 30° Angle ①

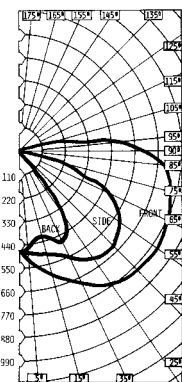

Photometric data shown on this page is based on a 200 Watt A-23 lamp and is representative of the performance for all Stylmaster incandescent fixtures. For candlepower values of fixtures with other lamps, multiply the given candlepower values by the following multipliers: for 75 W A19 – 0.31; for 100 W A19 – 0.45; for 150 W A21 – 0.75; and for 300 W PS25 – 1.65. For candlepower values of fixtures with guard, multiply by 0.90.

① Only listed for UL/NEC Fixtures.