

Rigid Couplings

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Sealing sleeves on both ends
- All couplings have straight threads (not tapered)
- Galvanized Rigid Couplings


Standards:

- Ferrous electrical conduit with PVC coating:
UL File # DYJC.E226472



Applications:

Calbond PVC Coated Rigid Couplings are used to couple two lengths of conduit. PVC Coated Rigid Couplings are supplied with PVC sleeves on both ends to ensure corrosion protection for the entire system.

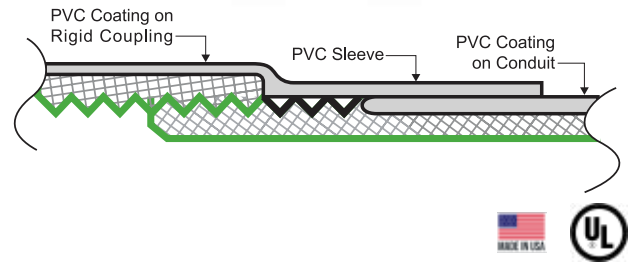

| Part Number | Trade Size (in) | Metric Size (mm) | Length of Metal (in) | Threads per Inch | Weight per 100 (lb) | Box Quantity |
|-------------|-----------------|------------------|----------------------|------------------|---------------------|--------------|
| PV0500CP00 | ½ | 16 | 1.500 | 14 | 19 | 100 |
| PV0700CP00 | ¾ | 21 | 1.532 | 14 | 32 | 90 |
| PV1000CP00 | 1 | 27 | 1.906 | 11½ | 40 | 75 |
| PV1200CP00 | 1¼ | 35 | 1.906 | 11½ | 50 | 42 |
| PV1500CP00 | 1½ | 41 | 1.906 | 11½ | 69 | 38 |
| PV2000CP00 | 2 | 53 | 1.937 | 11½ | 93 | 30 |
| PV2500CP00 | 2½ | 63 | 2.878 | 8 | 123 | 17 |
| PV3000CP00 | 3 | 78 | 3.031 | 8 | 217 | 14 |
| PV3500CP00 | 3½ | 91 | 3.094 | 8 | 422 | 11 |
| PV4000CP00 | 4 | 103 | 3.188 | 8 | 391 | 11 |
| PV5000CP00 | 5 | 129 | 3.374 | 8 | 550 | 8 |
| PV6000CP00 | 6 | 155 | 3.437 | 8 | 884 | 5 |

All dimensions are for informational purposes only *Tolerances +/- 5%

Aluminum Rigid Couplings

Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Sealing sleeves on both ends
- All couplings have straight threads (not tapered)
- 6063 T1 Aluminum Rigid Couplings

Standards:

- UL6A Listed File # E230584

Applications:

Calbond PVC Coated Rigid Aluminum Couplings are used to couple two lengths of conduit. PVC Coated Rigid Couplings are supplied with PVC sleeves on both ends to ensure corrosion protection for the entire system.

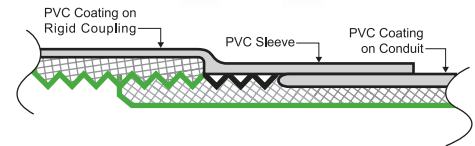

| Part Number | Trade Size (in) | Metric Size (mm) | Length of Metal (in) | Threads per Inch | Weight per 100 (lb) | Box Qty |
|-------------|-----------------|------------------|----------------------|------------------|---------------------|---------|
| PA0500CP00 | ½ | 16 | 1.500 | 14 | 100 | 100 |
| PA0700CP00 | ¾ | 21 | 1.532 | 14 | 90 | 90 |
| PA1000CP00 | 1 | 27 | 1.906 | 11½ | 75 | 75 |
| PA1200CP00 | 1¼ | 35 | 1.906 | 11½ | 42 | 42 |
| PA1500CP00 | 1½ | 41 | 1.906 | 11½ | 38 | 38 |
| PA2000CP00 | 2 | 53 | 1.937 | 11½ | 30 | 30 |
| PA2500CP00 | 2½ | 63 | 2.878 | 8 | 17 | 17 |
| PA3000CP00 | 3 | 78 | 3.031 | 8 | 14 | 14 |
| PA3500CP00 | 3½ | 91 | 3.094 | 8 | 11 | 11 |
| PA4000CP00 | 4 | 103 | 3.188 | 8 | 11 | 11 |
| PA5000CP00 | 5 | 129 | 3.374 | 8 | 8 | 8 |
| PA6000CP00 | 6 | 155 | 3.437 | 8 | 5 | 5 |

All dimensions are for informational purposes only *Tolerances +/- 5%

