

Rigid and IMC Fittings

LN Series Locknuts

Used to secure an ordinary nut from working loose by locking itself when screwed down tight.



Features

- Locknuts provide seal when fastening threaded conduit to unthreaded opening in a box or enclosure

Standard Materials/Finishes

- LN Zinc Die Cast
- LN-S Steel/Zinc Plated
- LN-SS Stainless Steel

Compliances and Certifications

- UL File No.E307843
- UL-514B
- Federal Specification A-A-50553
- CSA Standard C22.2 18.3-04
- NEMA FB-1


- Gasket of SLN-S: PVC

Zinc Die Cast Locknuts

LN



Catalog Number	Trade Size	Dimensions			
		A		B	
		Inch	mm	Inch	mm
LN-50	1/2"	1.10	27.9	0.16	4.1
LN-75	3/4"	1.36	34.5	0.17	4.3
LN-100	1"	1.69	42.9	0.20	5.1
LN-125	1-1/4"	2.12	53.8	0.21	5.3
LN-150	1-1/2"	2.37	60.2	0.21	5.3
LN-200	2"	2.90	73.7	0.21	5.3
LN-250	2-1/2"	3.44	87.4	0.28	7.1
LN-300	3"	4.13	104.9	0.28	7.1
LN-350	3-1/2"	4.69	119.1	0.28	7.1
LN-400	4"	5.20	132.1	0.28	7.1

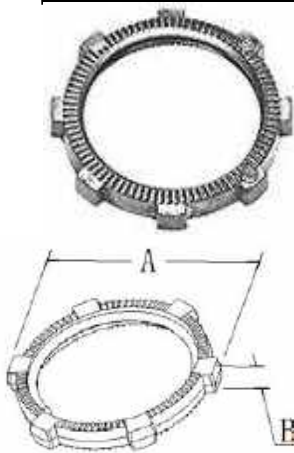

Rigid and IMC Fittings

LN Series Locknuts



Rigid and IMC Fittings

Steel Locknuts

LN-S

	Catalog Number	Trade Size	Dimensions			
			A		B	
			Inch	mm	Inch	mm
	LN-50S	1/2"	1.14	29.0	0.23	5.8
	LN-75S	3/4"	1.39	35.3	0.23	5.8
	LN-100S	1"	1.73	43.9	0.27	6.9
	LN-125S	1-1/4"	2.08	52.8	0.27	6.9
	LN-150S	1-1/2"	2.40	61.0	0.30	7.6
	LN-200S	2"	2.91	73.9	0.30	7.6
	LN-250S	2-1/2"	3.46	87.9	0.33	8.4
	LN-300S	3"	4.14	105.2	0.33	8.4
	LN-350S	3-1/2"	4.69	119.1	0.33	8.4
	LN-400S	4"	5.25	133.4	0.34	8.6
	LN-500S	5"	6.54	166.1	0.34	8.6
	LN-600S	6"	7.90	200.7	0.34	8.6