Couplings

Rigid Couplings



Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Sealing sleeves on both ends
- All couplings have straight threads (not tapered)
- Galvanized Ridgid Couplings

Standards:

- Ferrous electrical conduit with PVC coating: UL File # DYJC.E226472

Applications:

Calbond PVC Coated Rigid Couplings are used to couple two lengths of conduit. PVC Coated Rigid Couplings are supplied with PVC sleeves on both ends to ensure corrosion protection for the entire system.

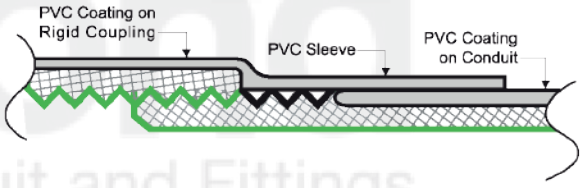

Calbond
PVC Coated Conduit and Fittings

Part Number	Trade Size (in)	Metric Size (mm)	Length of Metal (in)	Threads per Inch	Weight per 100 (lb)	Box Quantity
PV0500CP00	½	16	1.500	14	19	100
PV0700CP00	¾	21	1.532	14	32	90
PV1000CP00	1	27	1.906	11½	40	75
PV1200CP00	1¼	35	1.906	11½	50	42
PV1500CP00	1½	41	1.906	11½	69	38
PV2000CP00	2	53	1.937	11½	93	30
PV2500CP00	2½	63	2.878	8	123	17
PV3000CP00	3	78	3.031	8	217	14
PV3500CP00	3½	91	3.094	8	422	11
PV4000CP00	4	103	3.188	8	391	11
PV5000CP00	5	129	3.374	8	550	8
PV6000CP00	6	155	3.437	8	884	5

All dimensions are for informational purposes only *Tolerances +/- 5%

DICOM INGENIEROS SRL | Calbond™ PVC Coated Conduit and Fittings

Couplings

Aluminum Rigid Couplings



Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Sealing sleeves on both ends
- All couplings have straight threads (not tapered)
- 6063 T1 Aluminum Rigid Couplings

Standards:

- UL6A Listed File # E230584

Applications:

Calbond PVC Coated Rigid Aluminum Couplings are used to couple two lengths of conduit. PVC Coated Rigid Couplings are supplied with PVC sleeves on both ends to ensure corrosion protection for the entire system.

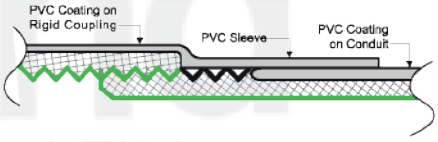

Calbond PVC Coated Conduit and Fittings

Part Number	Trade Size (in)	Metric Size (mm)	Length of Metal (in)	Threads per Inch	Weight per 100 (lb)	Box Qty
PA0500CP00	½	16	1.500	14	100	100
PA0700CP00	¾	21	1.532	14	90	90
PA1000CP00	1	27	1.906	11½	75	75
PA1200CP00	1¼	35	1.906	11½	42	42
PA1500CP00	1½	41	1.906	11½	38	38
PA2000CP00	2	53	1.937	11½	30	30
PA2500CP00	2½	63	2.878	8	17	17
PA3000CP00	3	78	3.031	8	14	14
PA3500CP00	3½	91	3.094	8	11	11
PA4000CP00	4	103	3.188	8	11	11
PA5000CP00	5	129	3.374	8	8	8
PA6000CP00	6	155	3.437	8	5	5

All dimensions are for informational purposes only *Tolerances +/- 5%