

Pipe Hangers

B3104 - Light-Duty Clevis Hanger

B3104F - Light-Duty Clevis Hanger - Felt Lined

B3104C - Light-Duty Clevis Hanger - PVC Coated

Size Range: 1/2" (15mm) to 4" (100mm) pipe


Material: Steel

Function: Recommended for the suspension of light stationary pipe allowing for vertical adjustment.

Approvals: Underwriter's Laboratories Listed in the USA (UL) and Canada (cUL) for sizes 3/4" (20mm) thru 4" (100mm). Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 12 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 1.

Standard Finish: Plain, Electro-Galvanized, or DURA-GREEN™

Order By: Part number and finish.

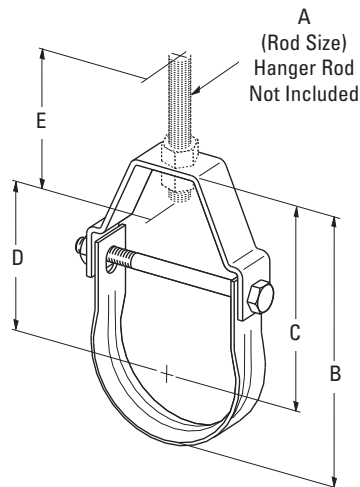

- B Bottom of pipe to top of hanger.
- C Center of pipe to top of hanger.
- D Rod Take-Out Center of pipe to bottom of hanger rod.
- E Minimum thread length of hanger rod.
- F Adjustment Top of cross bolt to bottom of hanger rod nut inside the hanger.



*Slide-Rite™ Clevis Hanger design for sizes 2, 3 & 4.

Pat. No. 5,848,770
5,924,655



B3104C



B3104F

Part No.	Pipe Size in. (mm)	Rod Size A	B in. (mm)	C in. (mm)
B3104-1/2	1/2" (15)	3/8"-16	1 ¹⁵ / ₁₆ " (49.2)	1 ¹ / ₂ " (38.1)
B3104-3/4	3/4" (20)	3/8"-16	2 ⁵ / ₁₆ " (58.7)	1 ³ / ₄ " (44.4)
B3104-1	1" (25)	3/8"-16	2 ³ / ₄ " (69.8)	2 ¹ / ₁₆ " (52.4)
B3104-1 ¹ / ₄	1 ¹ / ₄ " (32)	3/8"-16	3 ⁵ / ₁₆ " (84.1)	2 ⁷ / ₁₆ " (61.9)
B3104-1 ¹ / ₂	1 ¹ / ₂ " (40)	3/8"-16	3 ⁵ / ₈ " (92.1)	2 ⁵ / ₈ " (66.7)
B3104-2 *	2" (50)	3/8"-16	4 ¹³ / ₁₆ " (122.2)	3 ⁵ / ₈ " (92.1)
B3104-2 ¹ / ₂	2 ¹ / ₂ " (65)	1/2"-13	5 ¹³ / ₁₆ " (147.6)	4 ⁵ / ₁₆ " (109.5)
B3104-3 *	3" (80)	1/2"-13	6 ⁷ / ₁₆ " (163.5)	4 ⁵ / ₈ " (117.5)
B3104-3 ¹ / ₂	3 ¹ / ₂ " (90)	1/2"-13	6 ¹⁵ / ₁₆ " (176.2)	4 ¹⁵ / ₁₆ " (125.4)
B3104-4 *	4" (100)	1/2"-13	7 ³ / ₄ " (196.8)	5 ¹ / ₂ " (139.7)

Part No.	Rod Take-Out D in. (mm)	E in. (mm)	Adjustment F in. (mm)	Design Load Lbs. (kN)	Approx. Wt./100 Lbs. (kg)
B3104-1/2	1 ³ / ₁₆ " (20.6)	2 ¹ / ₂ " (63.5)	7 ¹ / ₁₆ " (11.1)	150 (.67)	13 (5.9)
B3104-3/4	1" (25.4)	2 ¹ / ₂ " (63.5)	7 ¹ / ₁₆ " (11.1)	250 (1.11)	22 (10.0)
B3104-1	1 ³ / ₈ " (34.9)	2 ¹ / ₂ " (63.5)	9 ¹ / ₁₆ " (14.3)	250 (1.11)	24 (10.9)
B3104-1 ¹ / ₄	1 ³ / ₄ " (44.4)	2 ¹ / ₂ " (63.5)	1 ³ / ₁₆ " (20.6)	250 (1.11)	29 (13.1)
B3104-1 ¹ / ₂	2" (50.8)	2 ¹ / ₂ " (63.5)	1" (25.4)	250 (1.11)	30 (13.6)
B3104-2 *	2 ¹⁵ / ₁₆ " (74.6)	2 ¹ / ₂ " (63.5)	1 ³ / ₄ " (44.4)	250 (1.11)	35 (15.9)
B3104-2 ¹ / ₂	3 ⁷ / ₁₆ " (87.3)	2 ¹ / ₂ " (63.5)	2" (50.8)	350 (1.55)	82 (37.2)
B3104-3 *	3 ³ / ₄ " (95.2)	2 ¹ / ₂ " (63.5)	2" (50.8)	350 (1.55)	91 (41.3)
B3104-3 ¹ / ₂	4" (101.6)	2 ¹ / ₂ " (63.5)	2" (50.8)	350 (1.55)	98 (44.4)
B3104-4 *	4 ⁹ / ₁₆ " (115.9)	2 ¹ / ₂ " (63.5)	2 ³ / ₁₆ " (55.6)	400 (1.78)	132 (59.9)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.