Hot Dip Galvanized Products

Malleable Iron Conduit Bodies for Rigid/IMC - Wet Location Rated for Assembly - HDG

For use with Rigid/IMC conduits and raceway.

Applications

- Act as pull outlets for conductors being installed
- Make bends and change direction for conduit system
- Provide opening for splicing
- Allow for branch connection runs
- Provide for access to conductors for future maintenance and system changes

Features

- Malleable Iron construction to provide extra strength
- **Hot dipped galvanized**
- Flat back suitable for mounting on surface
- Provide flexible choices for orders, supply with separate bodies or as assembly
- Rated for wet location when used with cover and gasket
- Roller optional from size of 1-1/4" and above for type LB and type C to facilitate cable pulling.
- **Interchangeable with top conduit body brands such as FORM 5, FORM 35, SERIES 35, DURALOY 5.**

Standard Materials/Finishes

Bodies:	Malleable Iron/ hot dip galvanized
Covers:	Stamped Steel or Malleable Iron
Gaskets:	Neoprene

Compliances and Certifications

- UL File No.E254321
- UL-514A

Hot Dip Galvanized

Hot Dip Galvanized Products

Malleable Iron Conduit Bodies for Rigid/IMC - Wet Location Rated for Assembly - HDG

LB Type - Hot Dip Galvanized





Size	Cat. #	Cat. # w/ Roller	Dimensions A Inch	A mm	B Inch	B mm	C Inch	C mm	Max# of Conductors
1/2"	LB-50M-HDG	-	4.69	119.1	2.18	55.4	1.36	34.5	N/A
3/4"	LB-75M-HDG	-	5.42	137.7	2.36	59.9	1.57	39.9	3 #6
1"	LB-100M-HDG	-	6.28	159.5	2.86	72.6	1.79	45.5	3 #4
1-1/4"	LB-125M-HDG	LBR-125M-HDG	8.12	206.2	3.49	88.6	2.52	64.0	3 #2
1-1/2"	LB-150M-HDG	LBR-150M-HDG	8.15	207.0	3.69	93.7	2.52	64.0	3 #1/0
2"	LB-200M-HDG	LBR-200M-HDG	10.53	267.5	4.52	114.8	3.15	80.0	3 #4/0
2-1/2"	LB-250M-HDG	LBR-250M-HDG	13.76	349.5	5.39	136.9	4.45	113.0	3 #300MCM
3"	LB-300M-HDG	LBR-300M-HDG	13.82	351.0	6.18	157.0	4.45	113.0	3 #400MCM
3-1/2"	LB-350M-HDG	LBR-350M-HDG	16.65	422.9	7.19	182.6	5.53	140.5	3 #500MCM
4"	LB-400M-HDG	LBR-400M-HDG	16.65	422.9	7.36	186.9	5.53	140.5	3 #500MCM

C Type - Hot Dip Galvanized





Size	Cat. #	Cat. # w/ Roller	Dimensions A Inch	A mm	B Inch	B mm	C Inch	C mm	Max# of Conductors
1/2"	C-50M-HDG	-	5.43	137.9	1.46	37.1	1.36	34.5	N/A
3/4"	C-75M-HDG	-	6.18	157.0	4.65	118.1	1.57	39.9	3 #6
1"	C-100M-HDG	-	7.16	181.9	1.98	50.3	1.79	45.5	3 #4
1-1/4"	C-125M-HDG	CR-125M-HDG	9.00	228.6	2.60	66.0	2.52	64.0	3 #2
1-1/2"	C-150M-HDG	CR-150M-HDG	9.00	228.6	2.80	71.1	2.52	64.0	3 #1/0
2"	C-200M-HDG	CR-200M-HDG	11.54	293.1	3.52	89.4	3.15	80.0	3 #4/0
2-1/2"	C-250M-HDG	CR-250M-HDG	15.28	388.1	3.98	101.1	3.15	80.0	3 #300MCM
3"	C-300M-HDG	CR-300M-HDG	15.39	390.9	4.65	118.1	4.45	113.0	3 #300MCM
3-1/2"	C-350M-HDG	CR-350M-HDG	18.30	464.8	5.43	137.9	4.45	113.0	3 #350MCM
4"	C-400M-HDG	CR-400M-HDG	18.30	464.8	5.74	145.8	5.53	140.5	3 #350MCM

Hot Dip Galvanized

+51 991 872 290

Siguenos en **nuestras redes**

Escanea el QR
Visita nuestro **Catálogo**

Hot Dip Galvanized Products

Malleable Iron Conduit Bodies for Rigid/IMC - Wet Location Rated for Assembly - HDG

LL and LR Type - Hot Dip Galvanized



Size	LL Type Cat. #	LR Type Cat. #	Dimensions A Inch	A mm	B Inch	B mm	C Inch	C mm	Max# of Conductors
1/2"	LL-50M-HDG	LR-50M-HDG	4.69	119.1	1.46	37.1	2.08	52.8	N/A
3/4"	LL-75M-HDG	LR-75M-HDG	5.42	137.7	1.65	41.9	2.34	59.4	3 #6
1"	LL-100M-HDG	LR-100M-HDG	6.28	159.5	1.98	50.3	2.68	68.1	3 #4
1-1/4"	LL-125M-HDG	LR-125M-HDG	8.12	206.2	2.60	66.0	3.41	86.6	3 #2
1-1/2"	LL-150M-HDG	LR-150M-HDG	8.15	207.0	2.80	71.1	3.45	87.6	3 #2
2"	LL-200M-HDG	LR-200M-HDG	10.53	267.5	3.52	89.4	4.15	105.4	3 #4/0
2-1/2"	LL-250M-HDG	LR-250M-HDG	13.76	349.5	3.98	101.1	5.86	148.8	3 #300MCM
3"	LL-300M-HDG	LR-300M-HDG	13.82	351.0	4.65	118.1	5.92	150.4	3 #350MCM
3-1/2"	LL-350M-HDG	LR-350M-HDG	16.65	422.9	5.43	137.9	7.14	181.4	3 #350MCM
4"	LL-400M-HDG	LR-400M-HDG	16.65	422.9	5.74	145.8	7.19	182.6	3 #350MCM

T Type - Hot Dip Galvanized



Size	Cat. #	Dimensions A Inch	A mm	B Inch	B mm	C Inch	C mm	Max# of Conductors
1/2"	T-50M-HDG	5.43	137.9	1.46	37.1	2.08	52.8	N/A
3/4"	T-75M-HDG	6.18	157.0	4.65	118.1	2.31	58.7	3 #6
1"	T-100M-HDG	7.16	181.9	1.98	50.3	2.68	68.1	3 #4
1-1/4"	T-125M-HDG	9.00	228.6	2.60	66.0	3.41	86.6	3 #2
1-1/2"	T-150M-HDG	9.00	228.6	2.80	71.1	3.45	87.6	3 #1
2"	T-200M-HDG	11.54	293.1	3.52	89.4	4.15	105.4	3 #2/0
2-1/2"	T-250M-HDG	15.28	388.1	3.98	101.1	5.86	148.8	3 #300MCM
3"	T-300M-HDG	15.39	390.9	4.65	118.1	5.92	150.4	3 #300MCM
3-1/2"	T-350M-HDG	18.30	464.8	5.43	137.9	7.14	181.4	3 #350MCM
4"	T-400M-HDG	18.30	464.8	5.74	145.8	7.19	182.6	3 #350MCM

Hot Dip Galvanized

Hot Dip Galvanized Products

Malleable Iron Conduit Bodies for Rigid/IMC - Wet Location Rated for Assembly - HDG

X Type - Hot Dip Galvanized



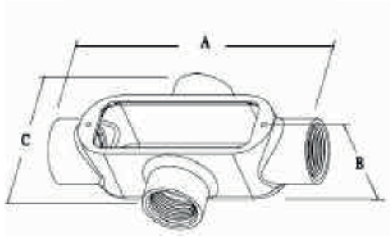

Size	Cat. #	Dimensions A Inch	A mm	B Inch	B mm	C Inch	C mm	Max# of Conductors
1/2"	X-50M-HDG	5.43	137.9	1.75	44.5	2.82	71.6	N/A
3/4"	X-75M-HDG	6.18	157.0	1.99	50.5	3.06	77.7	3 #6
1"	X-100M-HDG	7.16	181.9	2.25	57.2	3.56	90.4	3 #4
1-1/4"	X-125M-HDG	9.00	228.6	2.72	69.1	4.29	109.0	3 #2
1-1/2"	X-150M-HDG	9.00	228.6	2.80	71.1	4.37	111.0	3 #1/0
2"	X-200M-HDG	11.54	293.1	3.52	89.4	5.15	130.8	3 #2/0

TB Type - Hot Dip Galvanized





Size	Cat. #	Dimensions A Inch	A mm	B Inch	B mm	C Inch	C mm	Max# of Conductors
1/2"	TB -50M-HDG	5.43	137.9	1.46	37.1	1.36	34.5	N/A
3/4"	TB -75M-HDG	6.18	157.0	4.65	118.1	1.57	39.9	3 #6
1"	TB -100M-HDG	7.16	181.9	1.98	50.3	1.79	45.5	3 #6
1-1/4"	TB -125M-HDG	9.00	228.6	2.60	66.0	2.52	64.0	3 #6
1-1/2"	TB -150M-HDG	9.00	228.6	2.80	71.1	2.52	64.0	3 #4
2"	TB -200M-HDG	11.54	293.1	3.52	89.4	3.15	80.0	3 #1/0

Hot Dip Galvanized

Hot Dip Galvanized Products

Malleable Iron Conduit Bodies for Rigid/IMC - Wet Location Rated for Assembly

Cover and Gaskets Type



Size	Malleable Iron Cover -Hot Dip Galvanized w/ Neoprene gasket	w/o Neoprene gasket
1/2"	CG-50M-HDG	CG-50MNG-HDG
3/4"	CG-75M-HDG	CG-75MNG-HDG
1"	CG-100M-HDG	CG-100MNG-HDG
1-1/4" & 1-1/2"	CG-150M-HDG	CG-125/150MNG-HDG
2"	CG-200M-HDG	CG-200MNG-HDG
2-1/2" & 3"	CG-250/300M-HDG	CG-250/300MNG-HDG
3-1/2" & 4"	CG-350/400M-HDG	CG-350/400MNG-HDG

Assembly Description



Definition of suffix for pre-packaged condu

SUFFIX	Description	EXAMPLE Assembly	Hot Dip Galvanzied
CG	Malleable Iron cover with gasl	LB-50MCG	LB-50MCGHDG

Hot Dip Galvanized